




L2 with ball valve

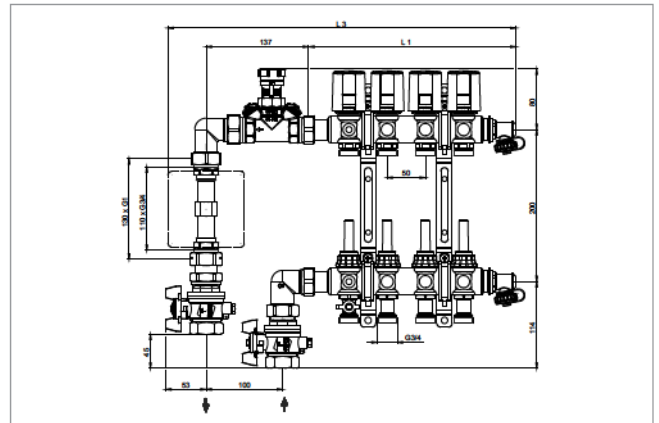

L3 with heat meter connection set, angle pattern

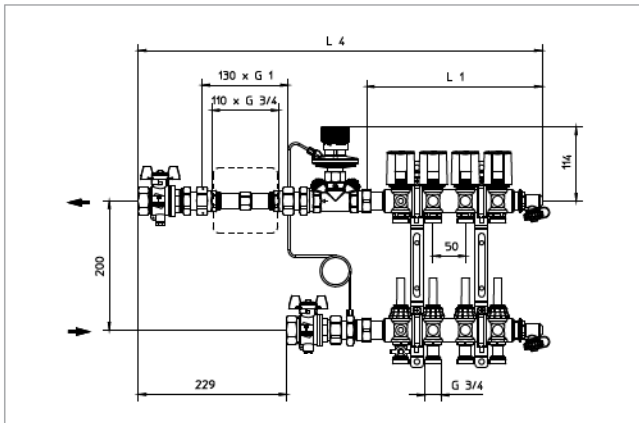

L4 with heat meter connection set, straight pattern

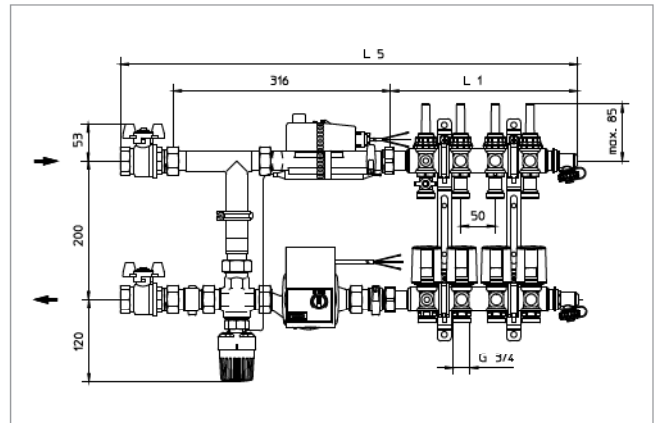

L5 with control unit and ball valve

Item no.	Number of heating circuits	L1 Length of distributor/collector	L2 with ball valve DN20	L2 with ball valve DN 25	L3 with heat meter connection set, angle pattern	L4 with heat meter connection set, straight pattern	L5 with control unit "Regufloor H" and ball valve DN 20	L5 with control unit "Regufloor H" and ball valve DN 25
1405352	2	168 mm	223 mm	248 mm	358 mm	523 mm	543 mm	568 mm
1405353	3	218 mm	273 mm	298 mm	408 mm	573 mm	593 mm	618 mm
1405354	4	268 mm	323 mm	348 mm	458 mm	623 mm	643 mm	668 mm
1405355	5	318 mm	373 mm	398 mm	508 mm	673 mm	693 mm	718 mm
1405356	6	368 mm	423 mm	448 mm	558 mm	723 mm	743 mm	768 mm
1405357	7	418 mm	473 mm	498 mm	608 mm	773 mm	793 mm	818 mm
1405358	8	468 mm	523 mm	548 mm	658 mm	823 mm	843 mm	868 mm
1405359	9	518 mm	573 mm	598 mm	708 mm	873 mm	893 mm	918 mm
1405360	10	568 mm	623 mm	648 mm	758 mm	923 mm	943 mm	968 mm
1405361	11	618 mm	673 mm	698 mm	808 mm	973 mm	993 mm	1.018 mm
1405362	12	668 mm	723 mm	748 mm	858 mm	1.023 mm	1.043 mm	1.068 mm

Recommendations for cabinets

Cabinet, item no. 1401151, no. 1, inner width: 560 mm	Cabinet, item no. 1401153, no. 3, inner width: 900 mm
Cabinet, item no. 1401152, no. 2, inner width: 700 mm	Cabinet, item no. 1401154, no. 4, inner width: 1200 mm