



High efficiency pumps

WITA Delta MIDI 40 | MIDI 60

Product specials

- Warranty
- Air vent program
- Keylock
- Anti-block function
- Also available with PWM module




Technical Data

Max. pump lift	4.0 m 6.0 m
Max. flow rate	2.800 l/h 3.600 l/h
Power consumption	3 - 23 W 3 - 42 W
Control	4 constant characteristics, 4 proportional characteristics, Air vent program, Keylock anti-block function
Supply voltage	1 x 230V, 50 Hz
Motor protection	No external motor protection required
Ip rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Temperature class	TF 110 as per CEN 335-2-51
Max. system pressure	10 bar
Connection size	DN 15, DN 20, DN 25, DN 32
Installation lengths	110 mm, 130 mm, 180 mm
Pump housing material	130 mm, 180 mm variant in grey cast iron cataphoresis coated; 110 mm, 130 mm variant in brass
Weight incl. insulation	2.5 kg
EEI	≤ 0.18 ≤ 0.20
Special equipment	Also available with PWM module



Characteristic WITA Delta MIDI 40

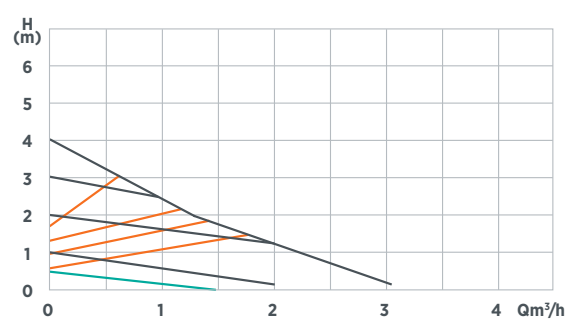

Characteristic WITA Delta MIDI 60

