

For varme- og kjøleanlegg.



Thinking solutions.

**Ekspansjonskar type G leveres med utskiftbar membran.**  
**Maks. arbeidstrykk 6 bar / 120°C**


Varenummer	Beskrivelse	Vekt kg	Diam. mm	H mm	h mm	Anslutning
201752160000	G 400	110	750	1350	185	DN 40/PN 6
201752260000	G 600	135	750	1830	195	DN 40/PN 6
201752360000	G 800	155	750	2225	185	DN 40/PN 6
201754660000	G 1000 Ø 750	186	750	2825	185	DN 40/PN 6
201752460500	G 1000 Ø 1000	248	1000	1975	230	DN 65/PN 6
201752660500	G 1500	297	1200	1975	305	DN 65/PN 6
201752760500	G 2000	370	1200	2430	305	DN 65/PN 6
201754460500	G 3000	640	1500	2480	340	DN 65/PN 6
201752960500	G 4000	828	1500	3050	340	DN 65/PN 6
201753060500	G 5000	905	1500	3590	340	DN 65/PN 6



6 & 10 bar

**Ekspansjonskar type G leveres med utskiftbar membran.**  
**Maks. arbeidstrykk 10 bar / 120°C**

Varenummer	Beskrivelse	Vekt kg	Diam. mm	H mm	h mm	Anslutning
201752020000	G 80	21	480	730	130	DN 40/PN 16
201752100000	G 400	145	750	1350	180	DN 40/PN 16
201752200000	G 600	175	750	1830	180	DN 40/PN 16
201752300000	G 800	210	750	2225	175	DN 40/PN 16
201754600000	G 1000 Ø 750	245	750	2825	175	DN 40/PN 16
201752400500	G 1000 Ø 1000	355	1000		210	DN 65/PN 16
201752600500	G 1500	410	1200		285	DN 65/PN 16
201752700500	G 2000	505	1200		285	DN 65/PN 16
201754400500	G 3000	870	1500		315	DN 65/PN 16
201752900500	G 4000	1120	1500		315	DN 65/PN 16
201753000300	G 5000	1330	1500		315	DN 65/PN 16

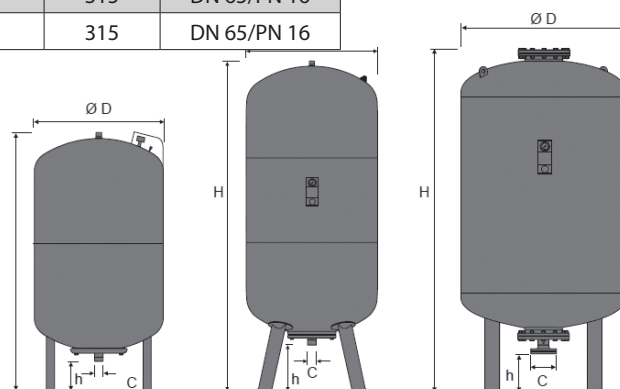

Oslo/ Asker  
 Bergen  
 Moss  
[www.sgp.no](http://www.sgp.no)

Tel: 67 52 21 21  
 Tel: 55 95 06 00  
 Tel: 69 20 54 90

